

GP3 TECHNICAL FILE

ONE-SIDED CABLE HOLDER

For direct installation of cable routes and engineering networks

PRODUCT REFERENCE

GP3-59247510


DOCUMENT TYPE

TECHNICAL DRAWING

DIMENSION UNIT

mm

DIMENSIONED PRODUCT DRAWING

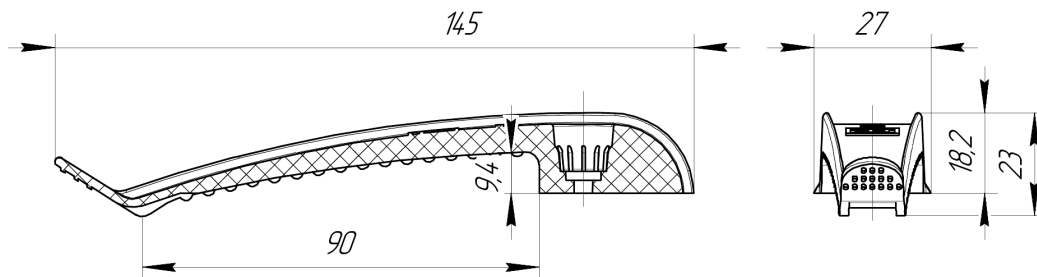

All dimensions shown in millimetres

APPLICATION AND INSTALLATION

For direct installation of electrical wiring, flat cable systems, low-current lines and other engineering networks. Suitable for open routing and installation inside corrugated protective pipes.

Rapid installation: May be used with compatible powder-actuated or engineering fastening guns on suitable substrates. Use only compatible fasteners and follow the tool manufacturer's operating and safety instructions.

Typical uses: power, communication, data, control and other engineering cable routes.

TECHNICAL DATA

Product	GP3-59247510
Holder type	One-sided holder for direct mounting
Capacity	One-sided cable routing
Material	HDPE + reinforced engineering polymer blend
Overall size	145 x 27 x 23 mm
Mounting details	Section depth 18.2 mm; mounting offset 9.4 mm; base span 90 mm
Color variants	White, grey and black