

GP3 TECHNICAL FILE

## DOUBLE-SIDED FLAT CABLE HOLDER - 8 POSITIONS

For direct installation of flat electrical cables

PRODUCT REFERENCE

**GP3-59247540**


DOCUMENT TYPE

**TECHNICAL DRAWING**

DIMENSION UNIT

**mm**

### DIMENSIONED PRODUCT DRAWING

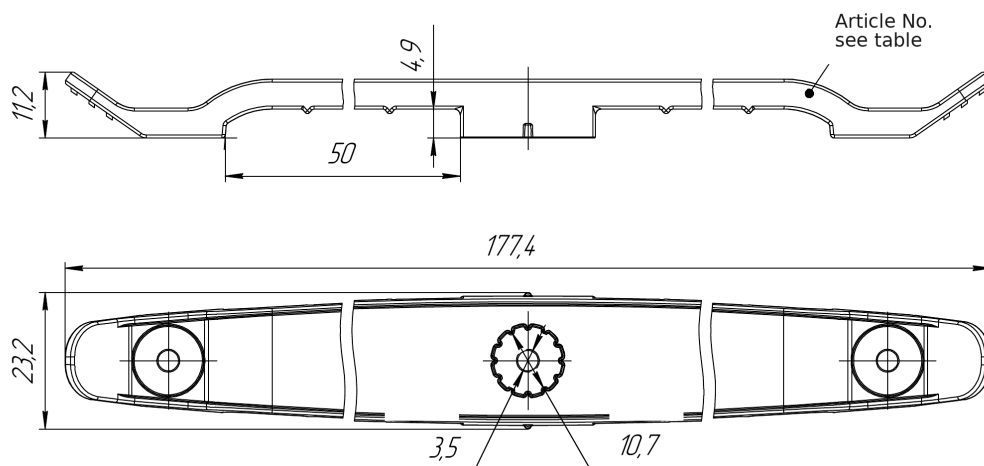

All dimensions shown in millimetres

### APPLICATION AND INSTALLATION

For direct installation of electrical wiring, flat cable systems, low-current lines and other engineering networks. Suitable for open routing and installation inside corrugated protective pipes.

Rapid installation: May be used with compatible powder-actuated or engineering fastening guns on suitable substrates. Use only compatible fasteners and follow the tool manufacturer's operating and safety instructions.

Typical uses: power, communication, data, control and other engineering cable routes.

### TECHNICAL DATA

|                         |                                                                          |
|-------------------------|--------------------------------------------------------------------------|
| <b>Product</b>          | GP3-59247540                                                             |
| <b>Holder type</b>      | Double-sided holder for direct mounting                                  |
| <b>Capacity</b>         | 8 flat cable positions                                                   |
| <b>Material</b>         | HDPE + reinforced engineering polymer blend                              |
| <b>Overall size</b>     | 177.4 x 23.2 x 11.2 mm                                                   |
| <b>Mounting details</b> | Mounting opening Ø10.7 mm; fastener opening Ø3.5 mm; support 50 x 4.9 mm |
| <b>Color variants</b>   | White, grey and black                                                    |