

GP3 TECHNICAL FILE

DOUBLE-SIDED FLAT CABLE HOLDER - 4 POSITIONS

For direct installation of flat electrical cables

PRODUCT REFERENCE

GP3-59247550


DOCUMENT TYPE

TECHNICAL DRAWING

DIMENSION UNIT

mm

DIMENSIONED PRODUCT DRAWING

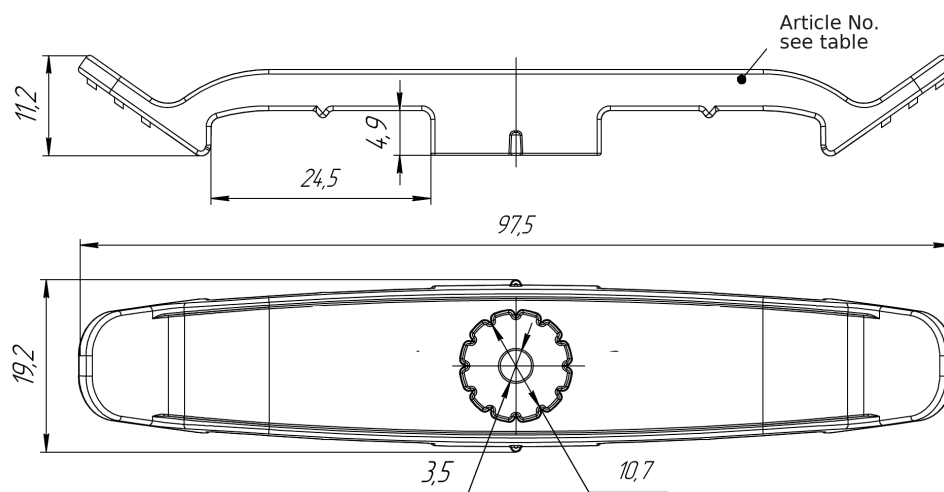

All dimensions shown in millimetres

APPLICATION AND INSTALLATION

For direct installation of electrical wiring, flat cable systems, low-current lines and other engineering networks. Suitable for open routing and installation inside corrugated protective pipes.

Rapid installation: May be used with compatible powder-actuated or engineering fastening guns on suitable substrates. Use only compatible fasteners and follow the tool manufacturer's operating and safety instructions.

Typical uses: power, communication, data, control and other engineering cable routes.

TECHNICAL DATA

Product	GP3-59247550
Holder type	Double-sided holder for direct mounting
Capacity	4 flat cable positions
Material	HDPE + reinforced engineering polymer blend
Overall size	97.5 x 19.2 x 11.2 mm
Mounting details	Mounting opening Ø10.7 mm; fastener opening Ø3.5 mm; support 24.5 x 4.9 mm
Color variants	White, grey and black