

GP3 TECHNICAL FILE

UNAGIRI SILICONE U-TYPE BASE

Direct-installation base for wiring and engineering networks

PRODUCT REFERENCE

GP3-59244928


DOCUMENT TYPE

TECHNICAL DRAWING

DIMENSION UNIT

mm

DIMENSIONED PRODUCT DRAWING

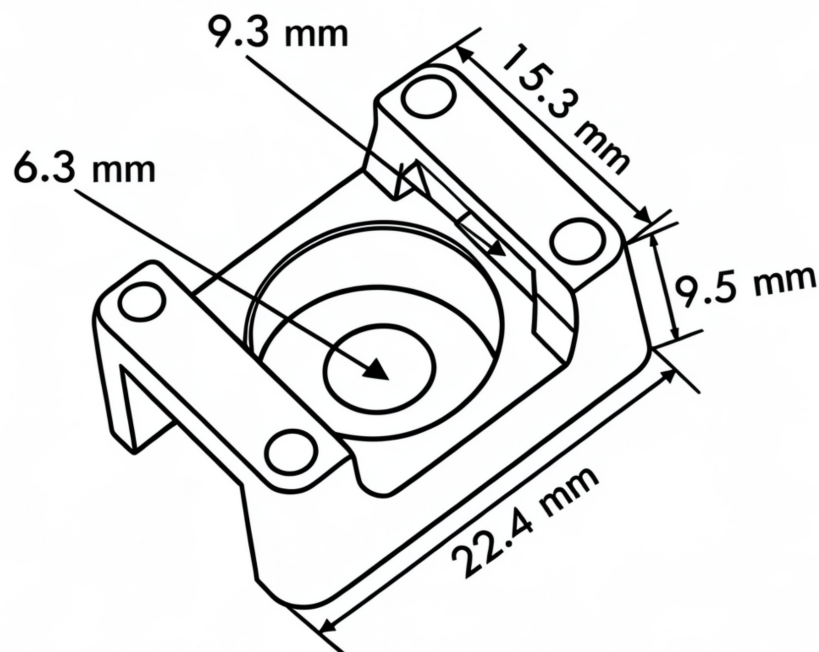

APPLICATION AND INSTALLATION

For direct installation of electrical wiring, cable routes, low-current lines and other engineering networks. Suitable for open routing and, where applicable, installation inside corrugated protective pipes.

Rapid installation: May be used with compatible engineering fastening guns or rapid-installation tools only when the fastener, plug/base and substrate are approved for that system. Follow the tool manufacturer's safety instructions.

Typical uses: power, communication, data, control and other engineering cable routes.

TECHNICAL DATA

Product	GP3-59244928
Product type	Unagiri silicone U-type mounting base
Variant	Unagiri silicone U-type mounting base with central fastening opening
Material	HDPE + reinforced engineering polymer blend
Colour	RAL 9012 white
Key dimensions	22.4 x 15.3 x 9.5 mm envelope; dimensions as shown on supplied sketch
Mounting details	Central opening and profile dimensions are shown on the supplied Unagiri silicone technical sketch
Weight	1.15 g

Final material, compatibility and fastening conditions must be confirmed against the applicable GP3 production specification.