

GP3 TECHNICAL FILE

CABLE-TIE WALL PLUG

Cable-tie wall plug for direct installation

PRODUCT REFERENCE

GP3-59247580


DOCUMENT TYPE

TECHNICAL DRAWING

DIMENSION UNIT

mm

DIMENSIONED PRODUCT DRAWING

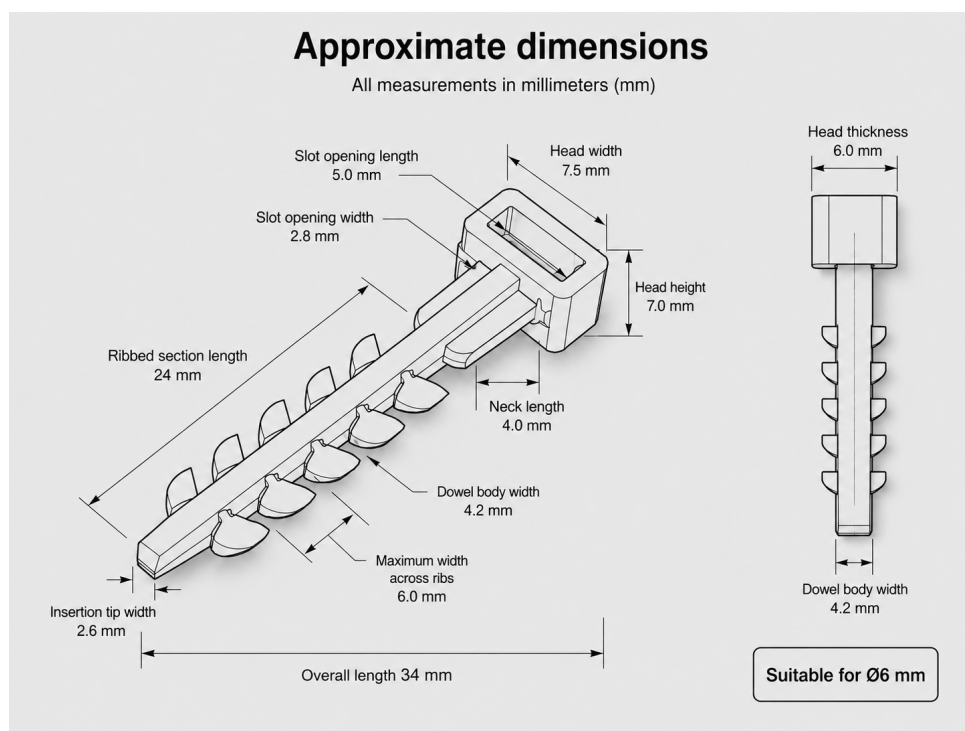

APPLICATION AND INSTALLATION

For direct installation of electrical wiring, cable routes, low-current lines and other engineering networks. Suitable for open routing and, where applicable, installation inside corrugated protective pipes.

Rapid installation: May be used with compatible engineering fastening guns or rapid-installation tools only when the fastener, plug/base and substrate are approved for that system. Follow the tool manufacturer's safety instructions.

Typical uses: power, communication, data, control and other engineering cable routes.

TECHNICAL DATA

Product	GP3-59247580
Product type	Cable-tie wall plug
Variant	Cable-tie wall plug for Ø6 mm fastening applications
Material	HDPE + reinforced engineering polymer blend
Colour	RAL 9005 / RAL 9012
Key dimensions	Overall L 34; ribbed section L 24; head W 7.5 x H 7.0 x thickness 6.0; slot L 5.0 x W 2.8; neck L 4.0; body W 4.2; maximum rib W 6.0; insertion tip W 2.6; suitable for Ø6 mm
Mounting details	Dimensions and insertion geometry are shown on the supplied dimensioned product sketch
Weight	1.00 g