

GP3 TECHNICAL FILE

CABLE-TIE WALL PLUG

Cable-tie wall plug for direct installation

PRODUCT REFERENCE

GP3-59247560


DOCUMENT TYPE

TECHNICAL DRAWING

DIMENSION UNIT

mm

DIMENSIONED PRODUCT DRAWING

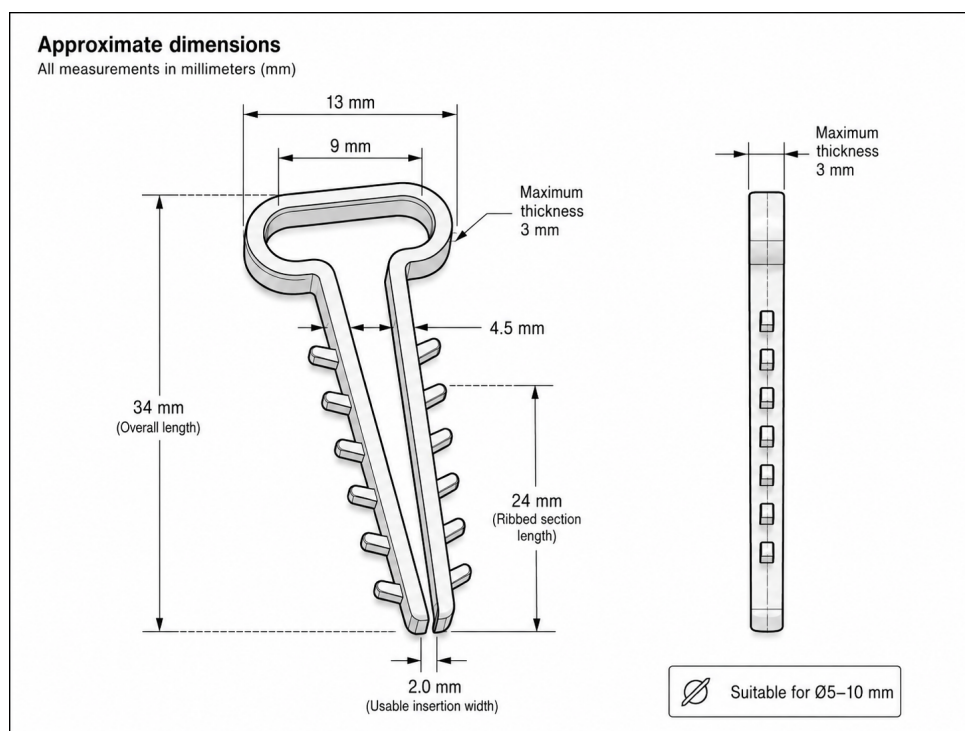

APPLICATION AND INSTALLATION

For direct installation of electrical wiring, cable routes, low-current lines and other engineering networks. Suitable for open routing and, where applicable, installation inside corrugated protective pipes.

Rapid installation: May be used with compatible engineering fastening guns or rapid-installation tools only when the fastener, plug/base and substrate are approved for that system. Follow the tool manufacturer's safety instructions.

Typical uses: power, communication, data, control and other engineering cable routes.

TECHNICAL DATA

Product	GP3-59247560
Product type	Cable-tie wall plug
Variant	Cable-tie wall plug for cable and engineering installations
Material	HDPE + reinforced engineering polymer blend
Colour	RAL 9005 / RAL 9012
Key dimensions	L 34; head W 13; opening W 9; max thickness 3; ribs 24; insertion W 2.0; suitable Ø5-10
Mounting details	Dimensions and insertion geometry are shown on the supplied dimensioned product sketch
Weight	1.00 g